




DATA SHEET

STG 1x1 | 6.0 - 24.0 kW

Steel Grid Resistor

cRUus 600 V

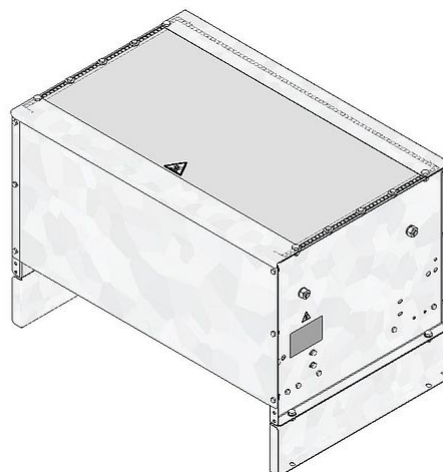


Article-No.		ds1000 1111			
Type		STG 111	STG 121	STG 131	STG 141
Pulse Power (kW) $T_a \sim 40^\circ\text{C}$ *referred to a cycle duration of 120s Approximate value (depending on resistance)	ED 6 %*	47.4	94.8	142.2	189.6
	ED 15 %*	25.2	50.4	75.6	100.8
	ED 25 %*	18	36	54	72
	ED 40 %*	13.2	26.4	39.6	52.8
Nominal continuous power (kW) $T_a \sim 40^\circ\text{C}$		6	12	18	24
Resistance Values at 20°C (Ohm)		0.1 - 55	0.1 - 30	0.2 - 20	0.3 - 15
Tolerance of resistance at 20°C		$\pm 10\%$			
Degree of protection (EN 60529) (in the accordingly screwed on state)		IP 20			
Max. permissible operating voltage		UL 600 V			
Cooling		natural convection			
Housing temperature at nominal continuous power $T_a \sim 40^\circ\text{C}$		$\leq 250^\circ\text{C}$			
Electrical terminal		bolt clamp M6, M8, M10, M12 / PE M6, M8, M10			
Operation temperature range		$-25 \dots +40^\circ\text{C}$			
Testing voltage		2.7 kV AC 1 s			
Approvals/markings		CE; UL; CSA			
Mounting positions					

Subject to technical modifications



DATA SHEET

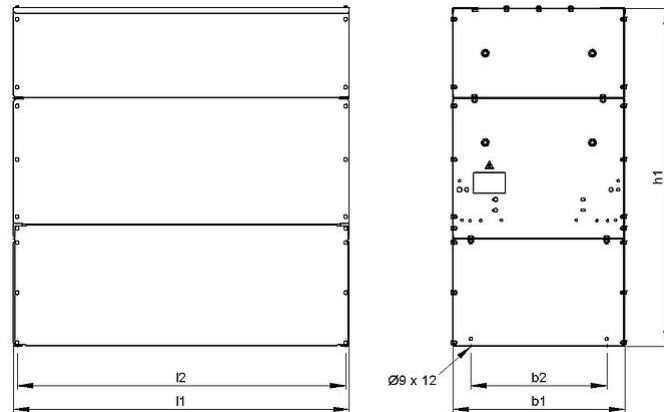

Article-No.		ds1000 1111			
Type		STG 111	STG 121	STG 131	STG 141
Length [mm]	l1	330	530	740	940
	l2	310	510	720	920
Width [mm]	b1	≤485	≤485	≤485	≤485
	b2	380	380	380	380
Height [mm]	h1	≤520	≤520	≤520	≤520
Weight approx. [kg]		19	25	32	42
Last update		2016-01-26			

Mounting instruction:

The resistor should be protected by appropriate safety measures against overloading.

Do not mount the resistor with any obstruction in the air inlet or air outlet area.

The resistor has to be grounded.